



JOTUN

WOODSHIELD

TRUE WOOD PROTECTION



GOLDEN SAND

The golden tone of the forest, symbolizes the richness and toughness of the woods. Truly a fruit of life.

Matt

Gloss




Autumn Oak

9087

Matt

Gloss

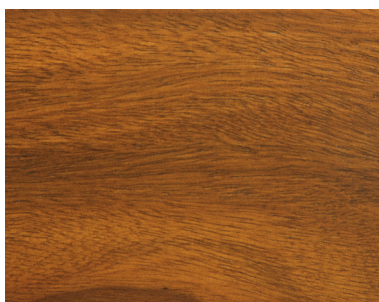

Teak

9088




Golden Pine

9089




Maize

9090

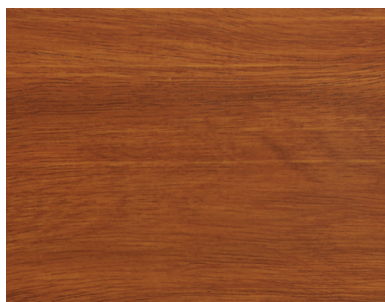


Chestnut

9091

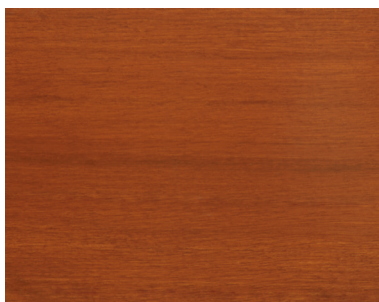


Maple

9092

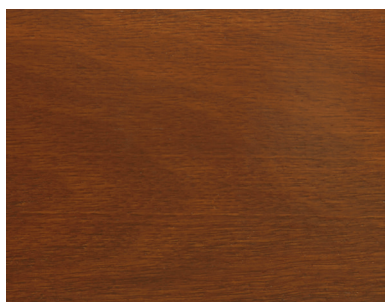

Almond

9093

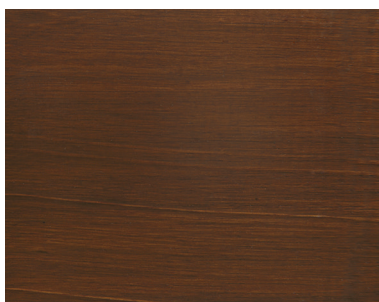

Walnut

9094



"Colours shown represent Jotun Woodshield on meranti wood. All colours reproduced are shown as close to actual colours as modern printing techniques allow. Final result varies depending on colour, texture, grain, porosity and type of wood. Where colour matching is critical, an applied sample is recommended."

FOREST WALK

Natural red and green elements of the forest path inspire ways to beautify the timber grain.

Matt

Gloss



Mint

9712

Matt

Gloss



Parsley

9713



Clover

9714




Cedar

9138



Cherry Red

9139

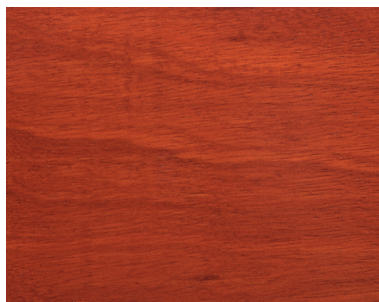


Mahogany

9140



Rosewood

9141

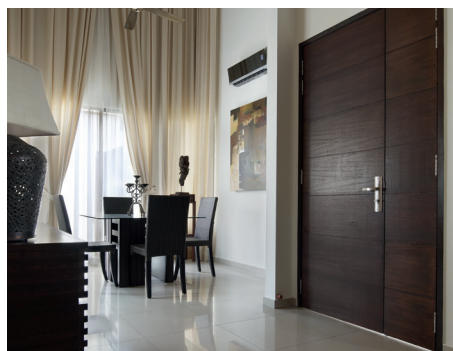


VARNISH

Transparent finish captures and preserves the natural elegance of the earthy wood.

Matt

Gloss

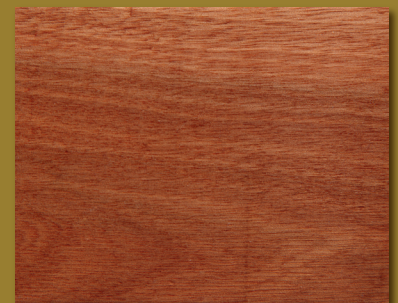

Matt

Gloss



Bronze Yellow

9095

Matt

Gloss



Sunset

9142


Matt

Gloss




Acacia

9143

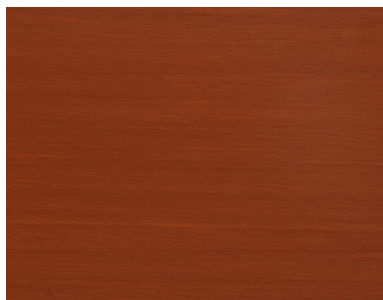


Nyatoh

9144

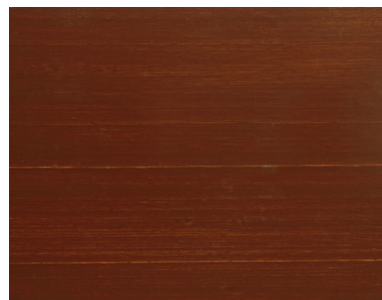

Buckeye

9145

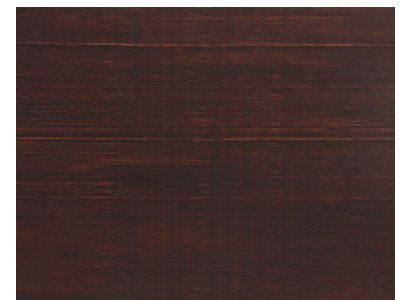


Palisander

9146



Carbon Grey

9147

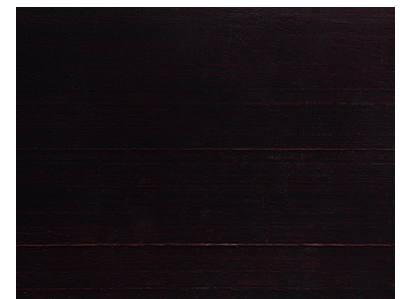

Ebony

9096

SEMI-OPAQUE SHADES

Inspirations from season change, colours from spring to fall; opaque shades bestow solid colour textures that are easily simulated and sustained for years to come.



WOODSHIELD

TRUE WOOD PROTECTION



Woodshield Exterior



Woodshield Exterior has been specifically formulated with 2X UV Protection, good flexibility and deep penetration into the wood. It protects the wood 2X longer than conventional wood finish products.

Suitable for all exterior wood such as doors, trims, frames, trellis, fences, railings, roofs, windows and balconies.

Available in Multicolor Tintable Stains and Varnish, in Gloss and Matt



2X Longer Performance

- Provide protective barrier against harsh weather for longer lasting, durable wood protection.



2X UV Protection

- Minimise colour fading and protection against wood crack, peel and erosion from sunlight to save time and money on maintenance.



Low Odour

- Painting made pleasant, thanks to less smell during and after application.





JOTUN



Woodshield Deck



Woodshield Deck is the ultimate protection for wood surfaces that are exposed to the elements as well as frequent wear and tear. It provides a tough, scratch resistant film that is flexible enough to meet wood expansion and contraction requirements.

Suitable for all exterior wooden decks, interior wooden floors/parquet, outdoor/garden furniture and all wood fixtures exposed to frequent use.

Available in Multicolor Tintable Stains and Varnish, in Gloss and Matt



Scratch Resistance

- Reduce visible scratches and marks for enduring natural wood beauty without need for frequent wood finishing maintenance.



2X UV Protection

- Minimise colour fading and protection against wood crack, peel and erosion from sunlight to save time and money on maintenance.



Fast Drying

- Convenient and quick drying solution that saves time, energy and manpower.



Low Odour

- Painting made pleasant, thanks to less smell during and after application.

Additional Features for All Woodshield Range



Good Flexibility

- Withstands constant wood expansion and contraction that minimises undesired effects like cracking; therefore, protecting and preserving wood investment.



Anti Fungal

- Prevents unsightly growth of surface fungus to maintain beautiful, healthy wood.



Water Resistance

- Prevents moisture absorption for prolonged wood life and preserved natural warmth and beauty.



Heavy Metals Free

- Non-hazardous and environmentally-friendly without compromising performance and beauty.
- Does not contain Lead, Mercury, Chromium, Cadmium and Arsenic.

WOODSHIELD

TRUE WOOD PROTECTION

Painting Guide

Wood surface must be suitably prepared, clean, dry and free from traces of dust, dirt, wax and grease. The moisture content should not exceed 15% prior to coating.

STEP 1



- Sand the surface of the wood thoroughly with #400 grit sand paper.

STEP 2



- Wipe the wood surface with a cloth dampened with Jotun Thinner No.2 to remove dust and particles. Allow it to dry fully before painting.

STEP 3



- Apply 1 coat of Woodshield. Please refer below table for recommended recoating time.

Step 4: Repeat steps 1, 2, 3 using #600 grit sand paper after 1st coat of Woodshield.

For new wood

Step 5: Repeat again steps 1, 2, 3 using #1000 grit sand paper after 2nd coat of Woodshield.

	Woodshield Exterior	Woodshield Deck
Drying Time (Hours)	3-4	1-2
Recoating Time (Hours)	8	4
Coverage	14-16m ² /litre	12-14m ² /litre
Thinning	Dilution is not necessary for brush and roller application. If required, dilute with Jotun Thinner No.2 (max 5%). For spray application, dilute with Jotun Thinner No.2 (max 15%).	
Application	Brush, roller or air spray.	
Cleaning	Clean brushes and tools with Jotun Thinner No.2.	

WOODSHIELD

TRUE WOOD PROTECTION



EXTERIOR

Deep Penetrating
Resin with Advanced
UV Absorbers

DECK

Urethane Alkyd
Technology with
Advanced UV
Absorbers

TECHNOLOGY



2X LONGER
PERFORMANCE



2X UV
PROTECTION



FAST DRYING



LOW ODOUR



SCRATCH
RESISTANCE



GOOD FLEXIBILITY



ANTI FUNGAL



WATER RESISTANCE



HEAVY METALS FREE



JOTUN

Paint for iconic buildings
and beautiful homes

JOTUN PAINTS (MALAYSIA) SDN. BHD. (824636-K)

Lot 7, Persiaran Perusahaan, Seksyen 23, 40300 Shah Alam, Selangor, Malaysia. Tel: +603 5123 5500

jotun.com.my

