




# KAISEN AUTOGATE

Distributed by



## Specification Chart

### Kaisen Autogate

Power Supply	220V/50Hz AC
Starting Current	3A;
Running Speed	12m/min
Environment Temperature	-25C° ~ +55°C
Motor Power	550W/750W/1200W
Motor Speed	1400r/min
Motor Weight	12.7 - 16.7 kg
Suitable door weight	800kg/1200kg/2000kg



# T329 Control Board for Sliding Opener (AC220V)


Input voltage: AC220V /50Hz + - /10%

Maximum Current :5A

Fuse: 10A

Remote control distance : open land > 30 M

## Control panel interface and function use

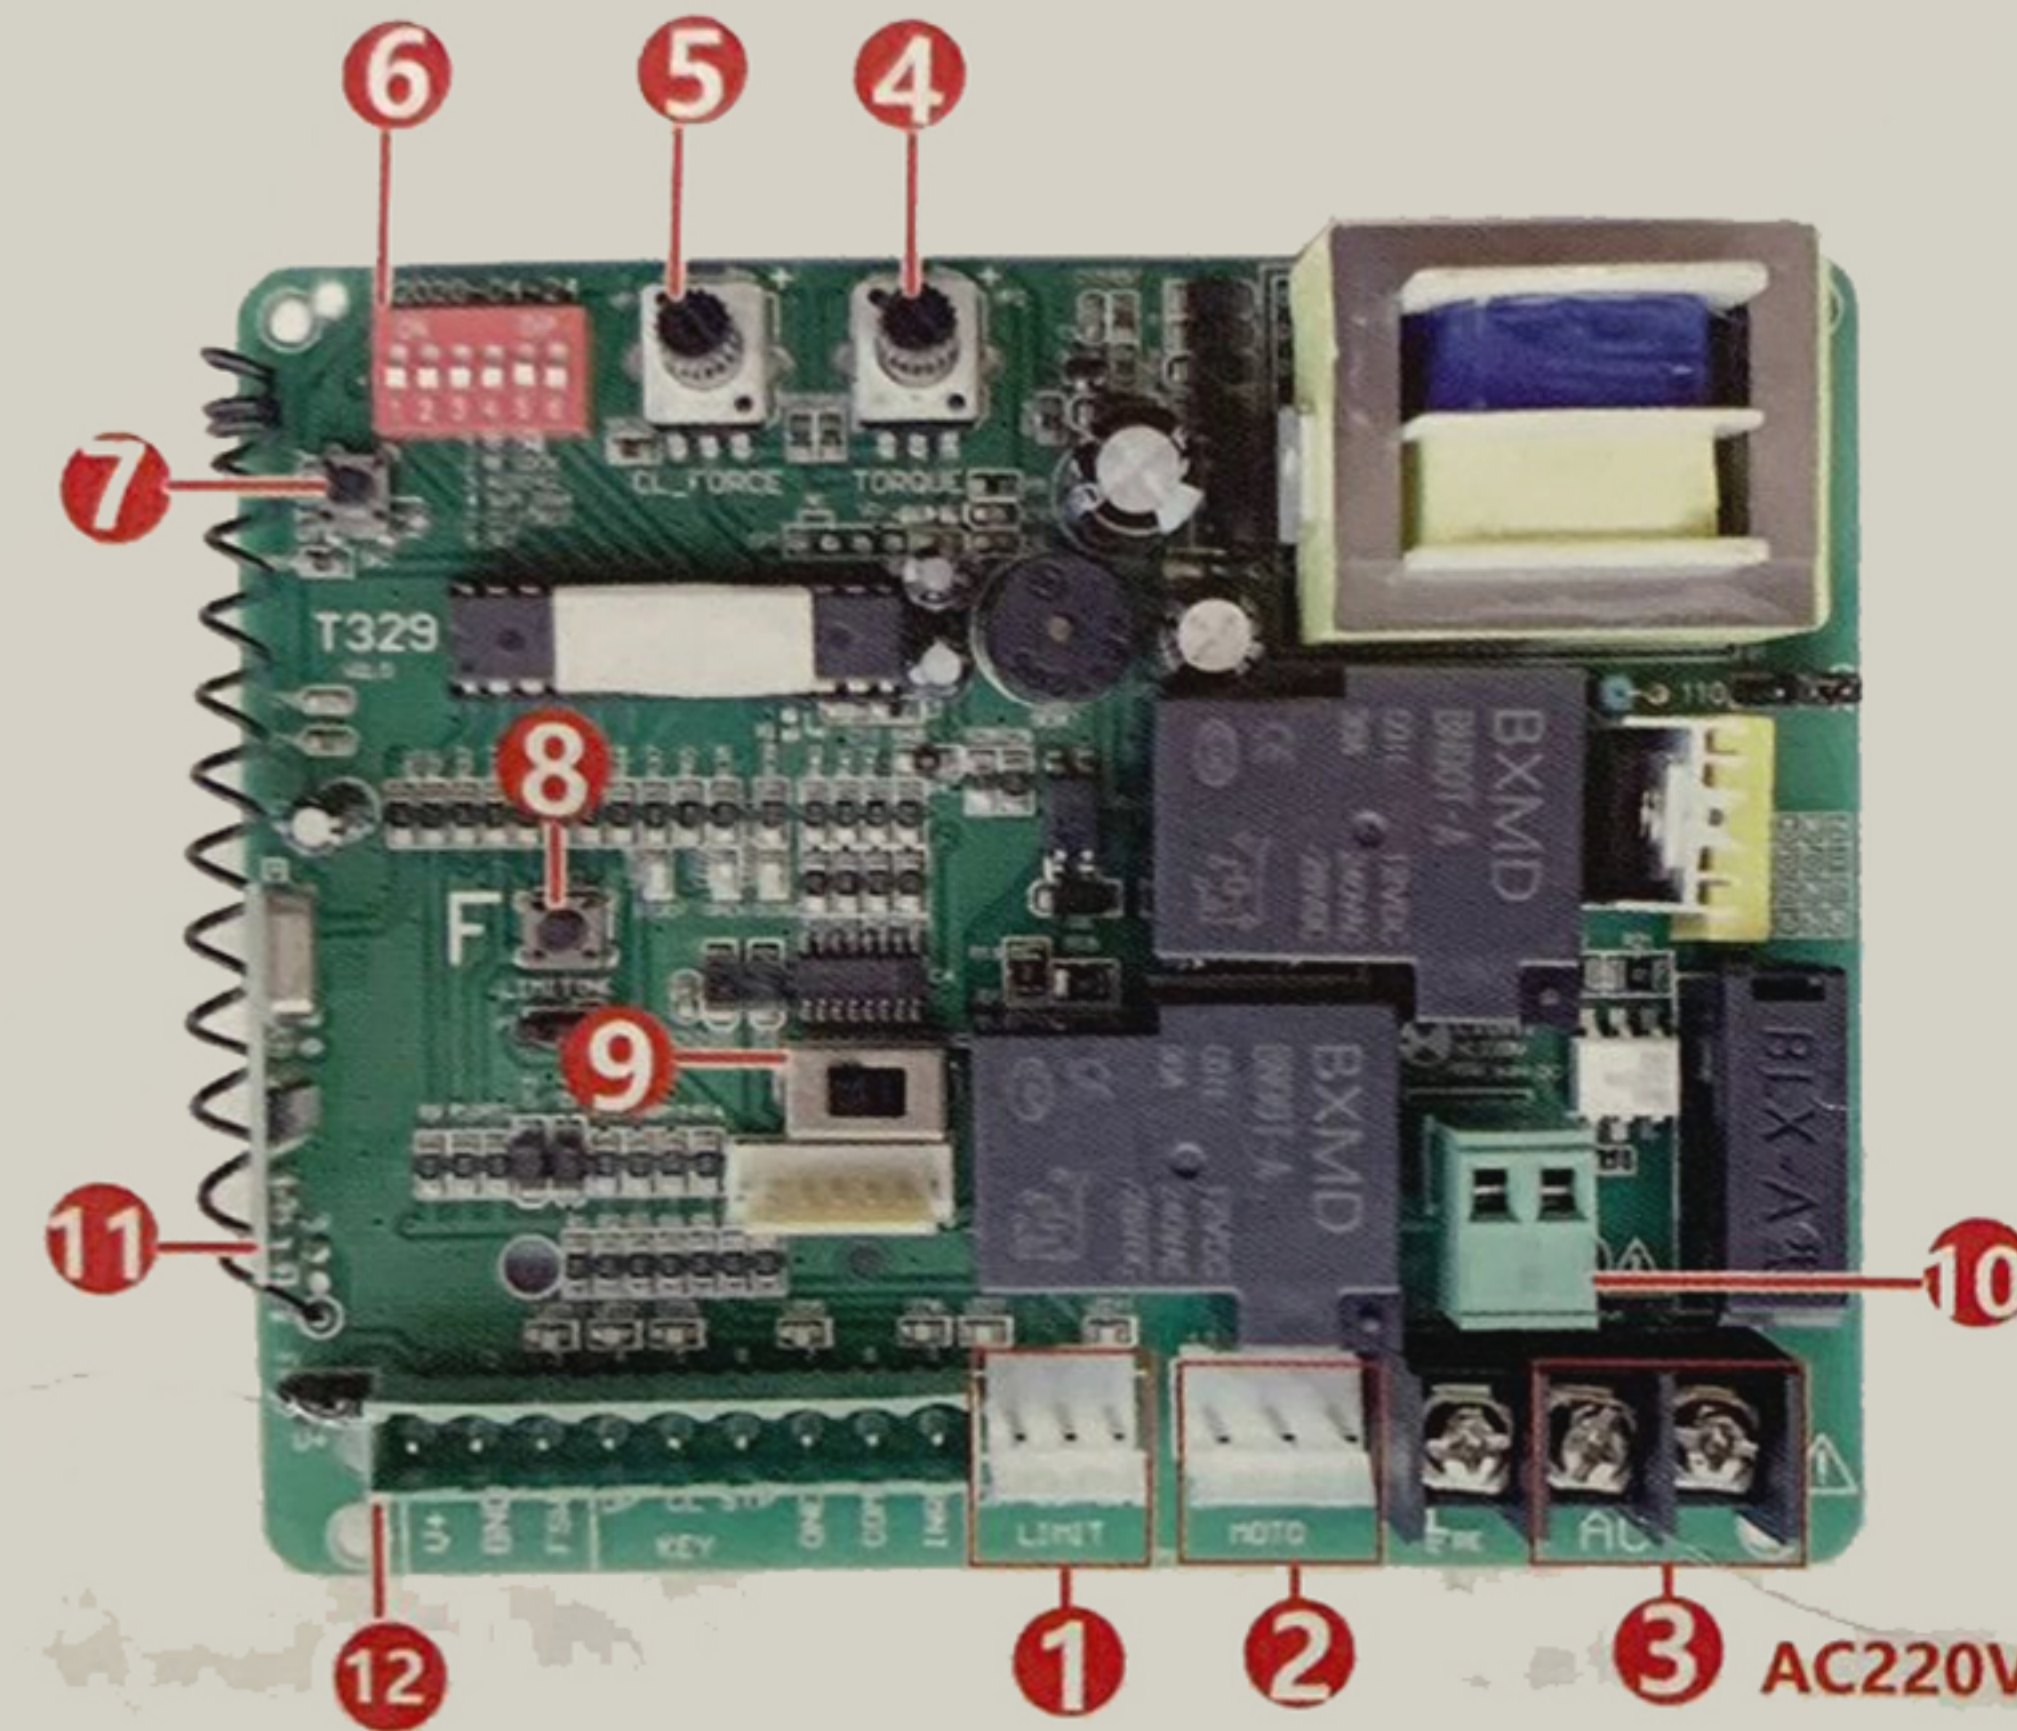

1. Limit line (O.P COM C.L)
2. Motor line (L1 COM L2)
3. Supply power :AC220V + - 10%
4. TORQUE adjustable
5. CL\_FORCE adjustable
6. FUNCTION SET B1RF ONE→single button on remote B2RF LOCK → remote manual lock function B3 AUTO CL→automatic close B4Soft start B5CL\_FORCE → Encountered obstacle return B6SET

7. Remote control STUDY key


8. F key is manual cycling switch , OPEN-STOP-CLOSE- STOP

9. Adjust the motor direction turn left or turn right


10.AC220V Light interface

11.Receiving module of remote and antenna


12.Optional accessories interface ,such as manual switch , infrared sensor, keypad access system and so on .

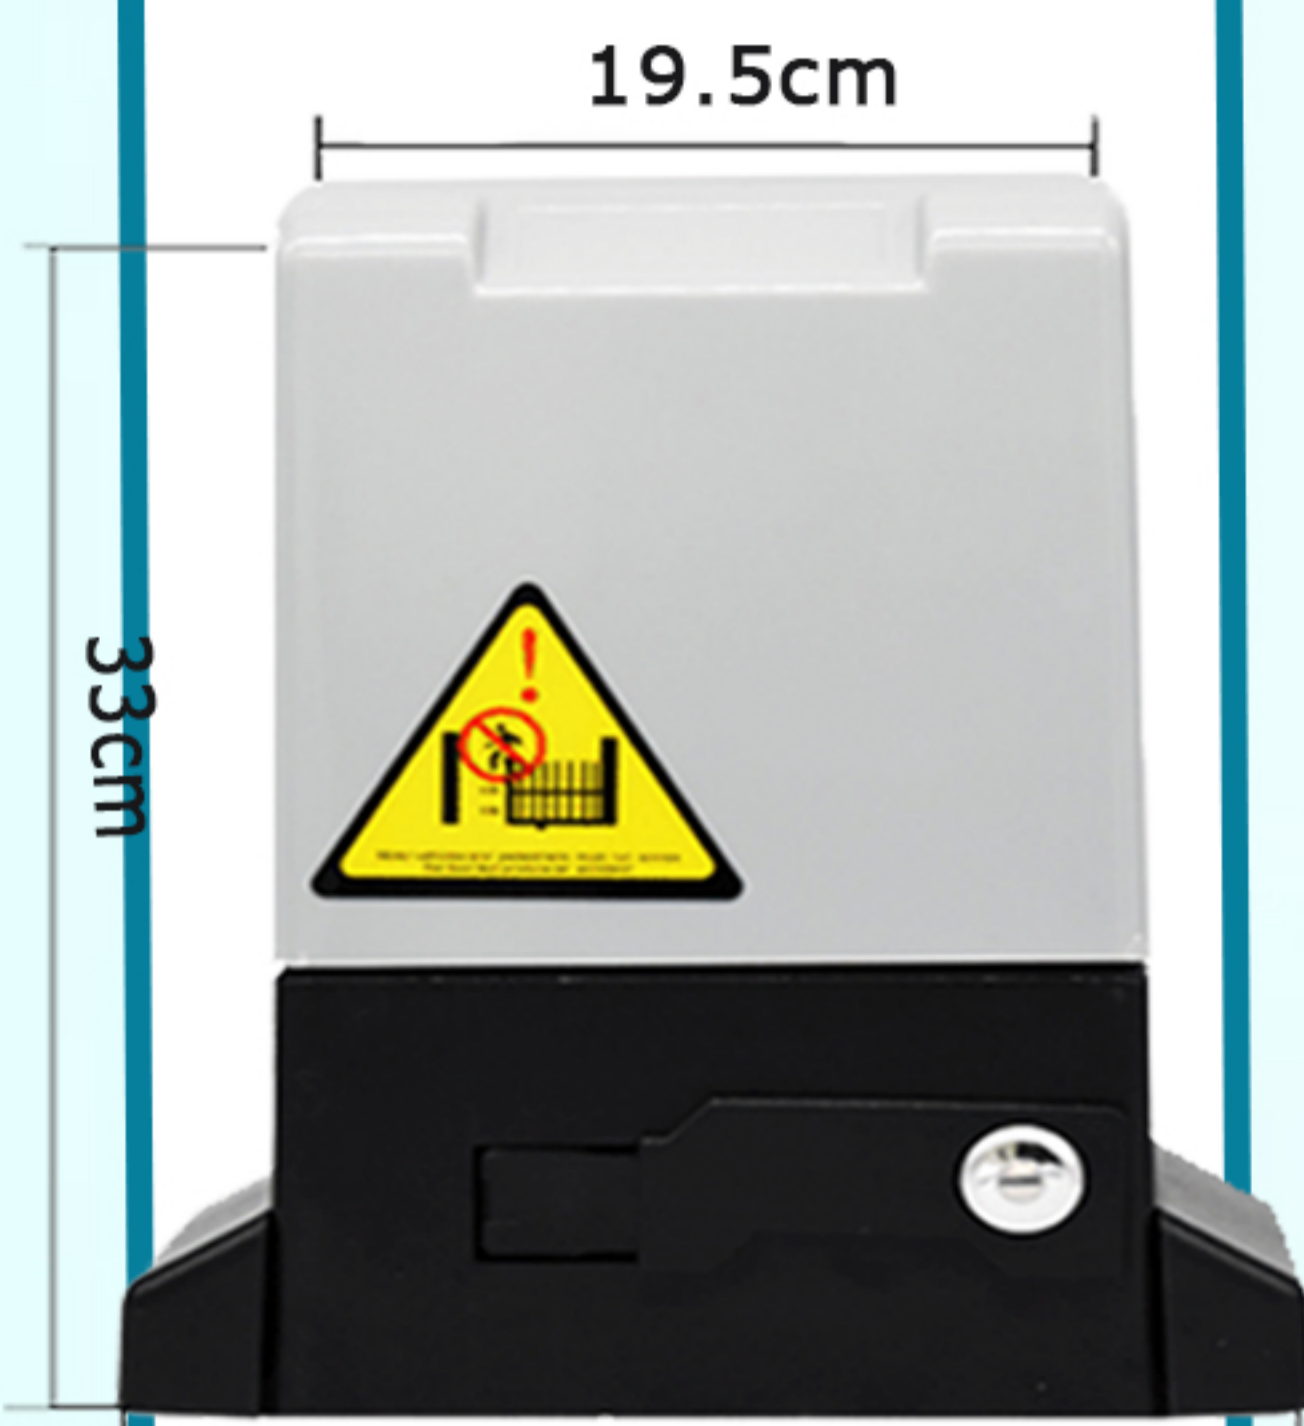

27.4cm

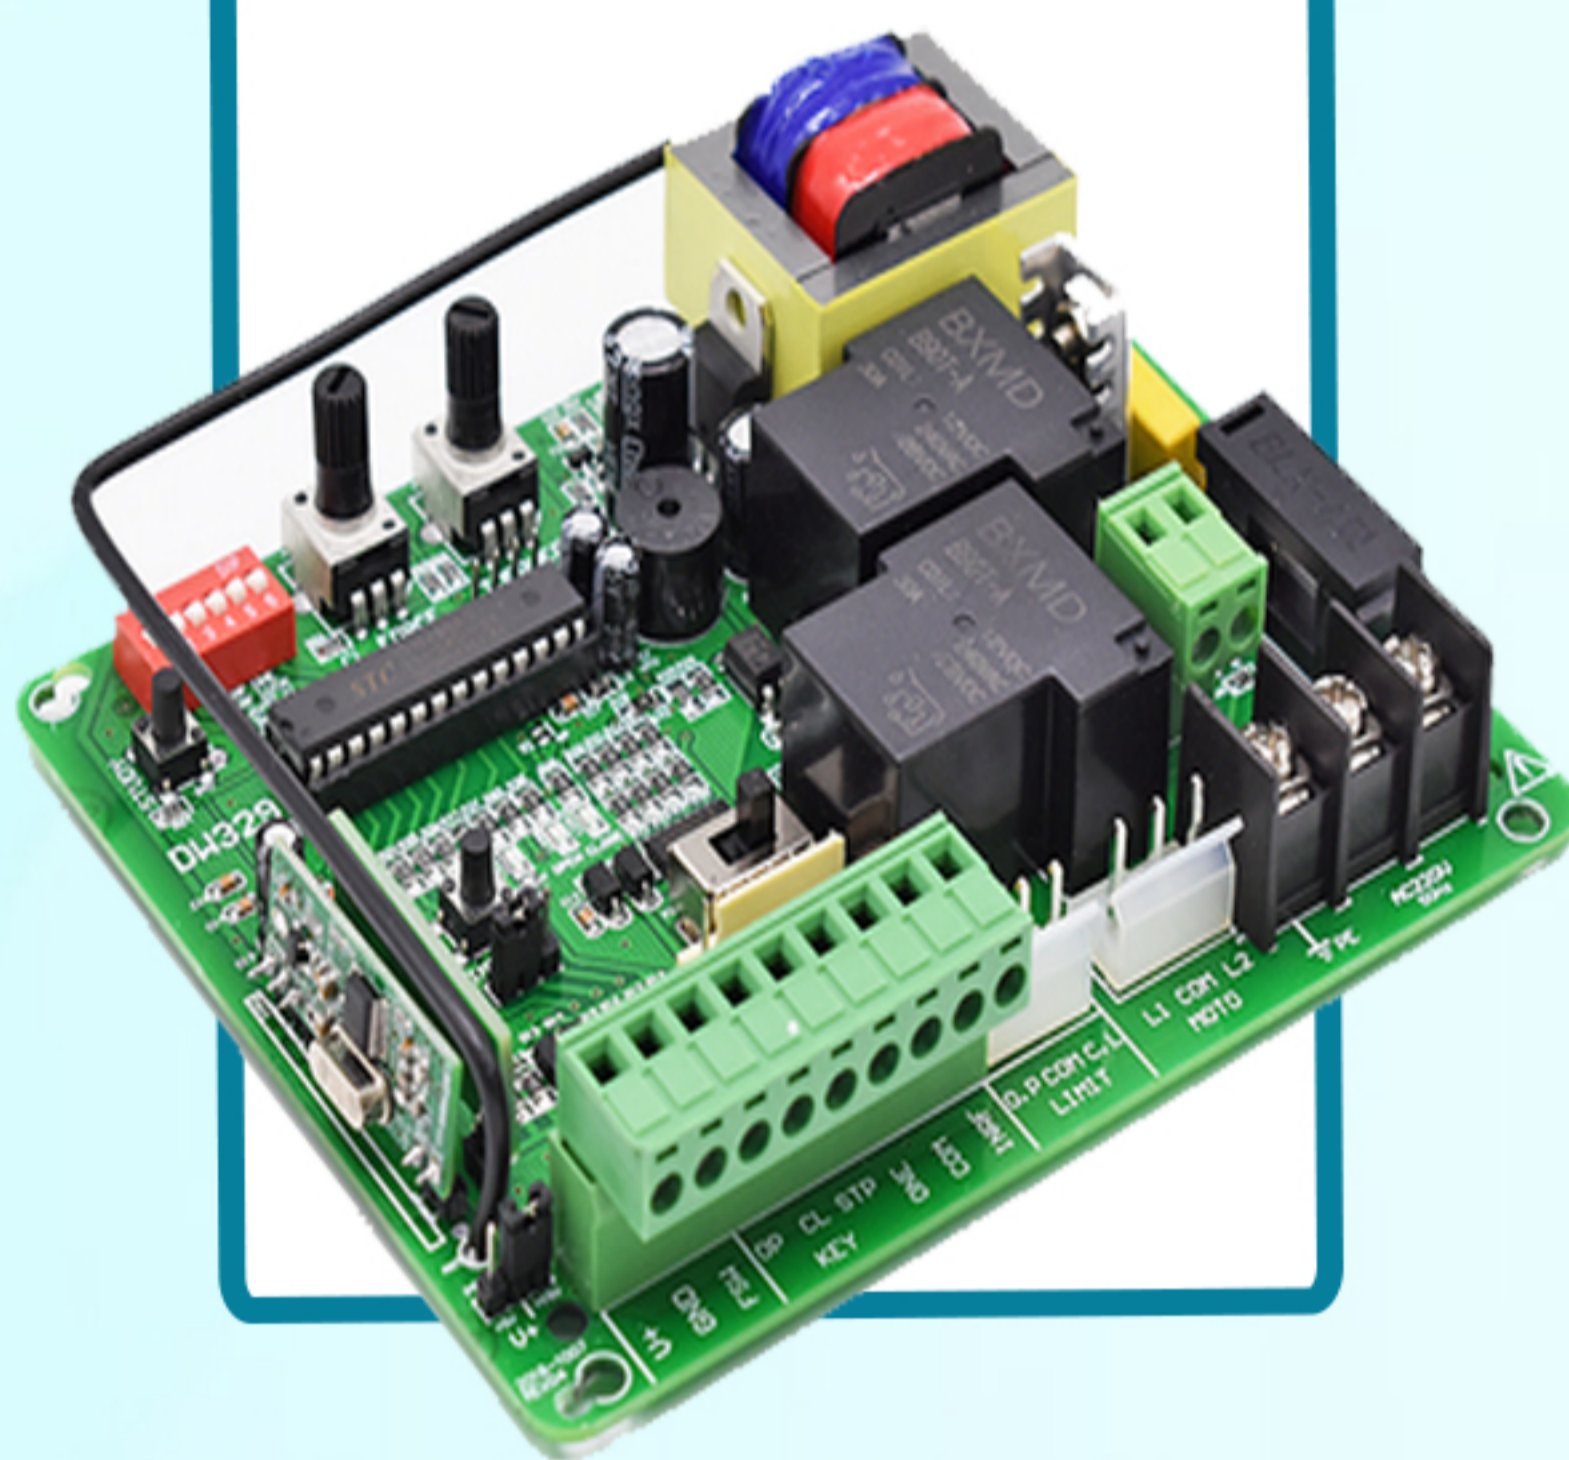

## Motor Wiring Diagram

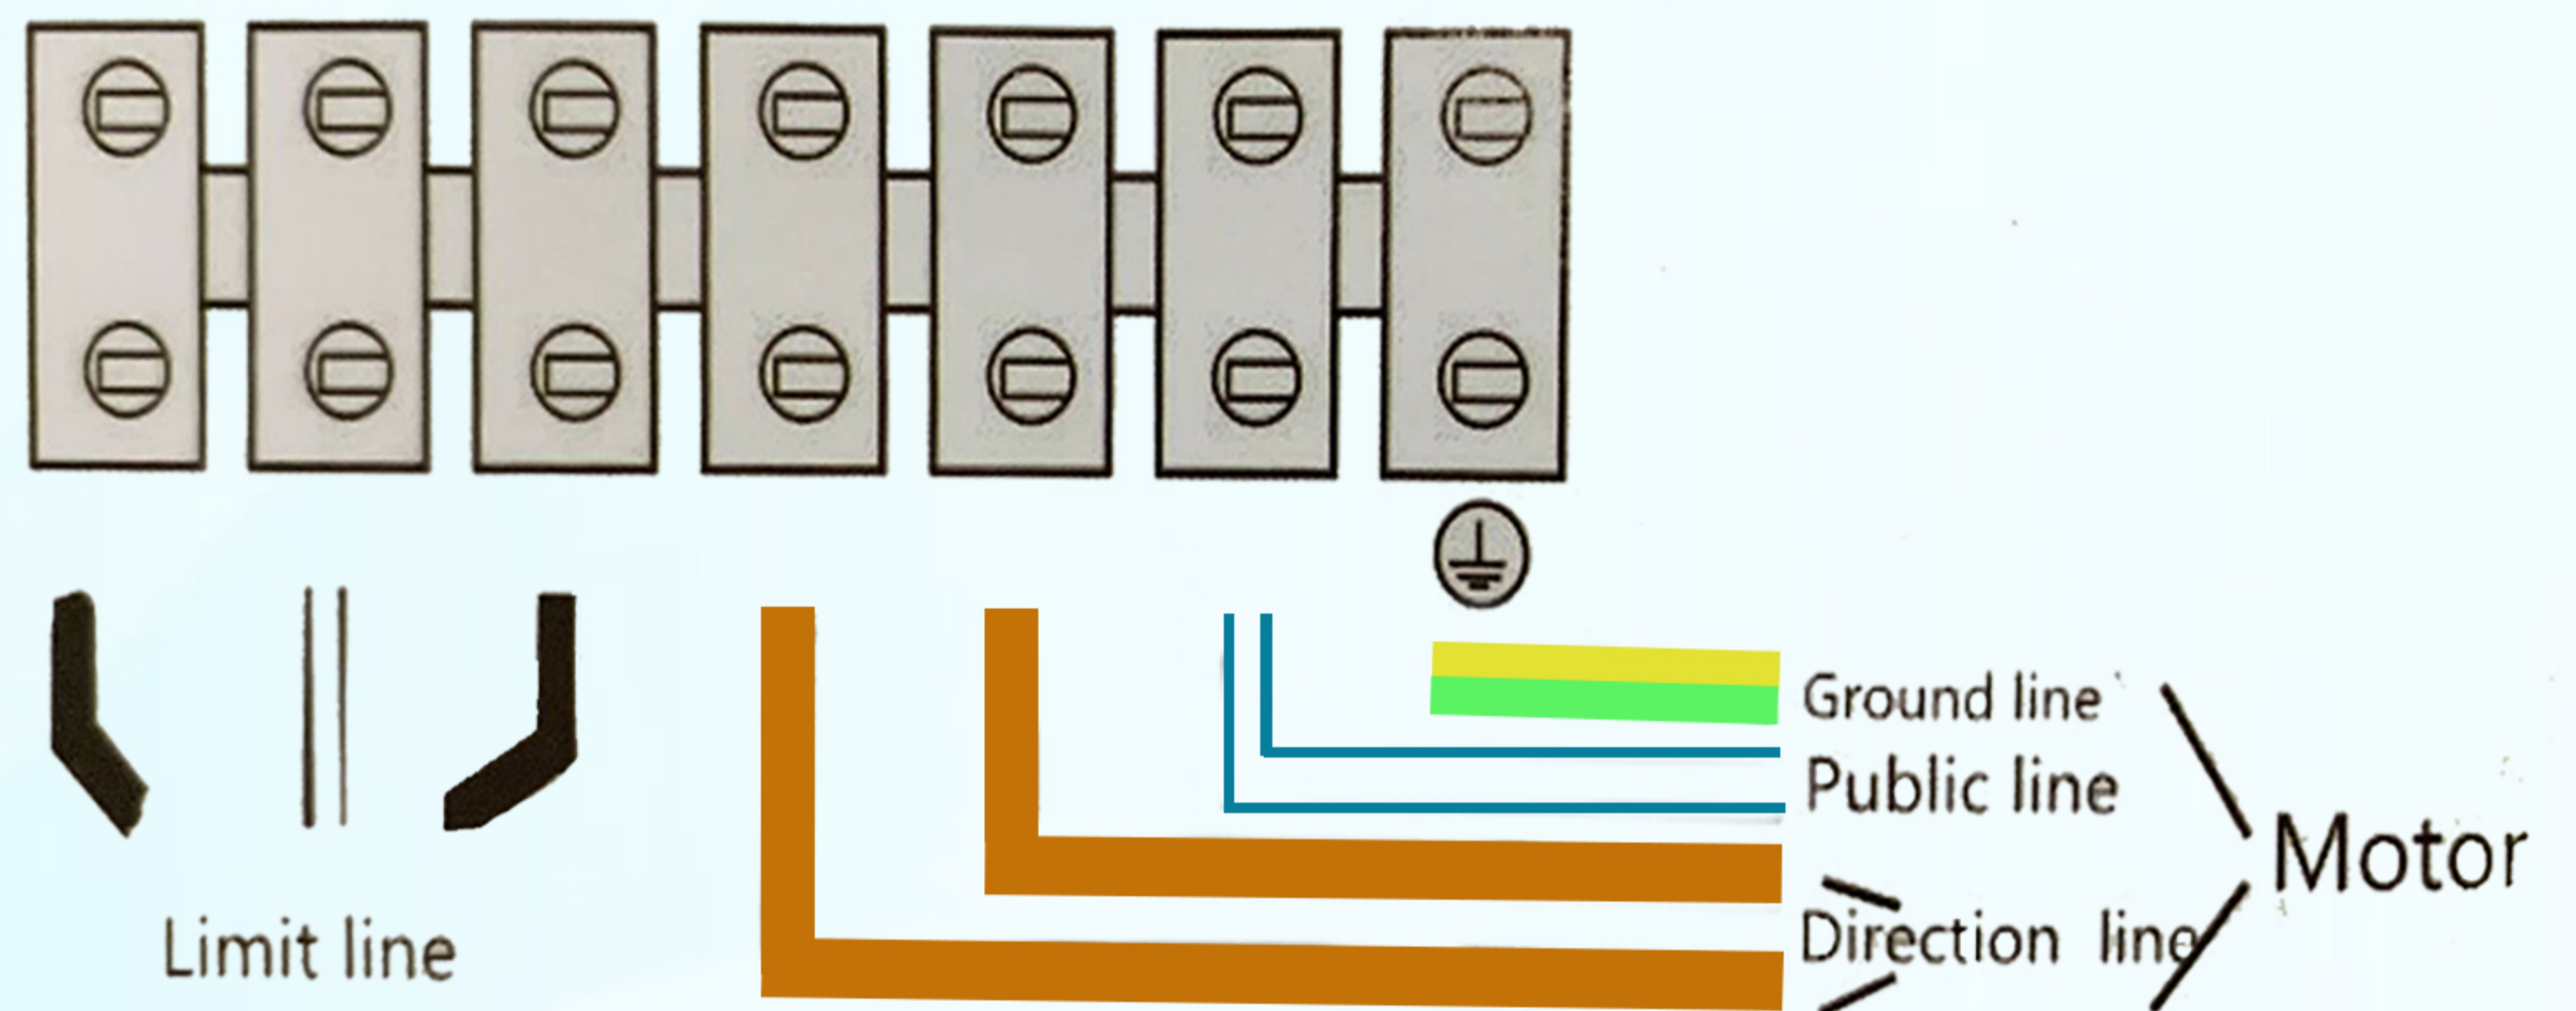


Controller connection, please read the controller specification

## Remote Control



## Sliding Gate Opener Installation Schematic Diagram

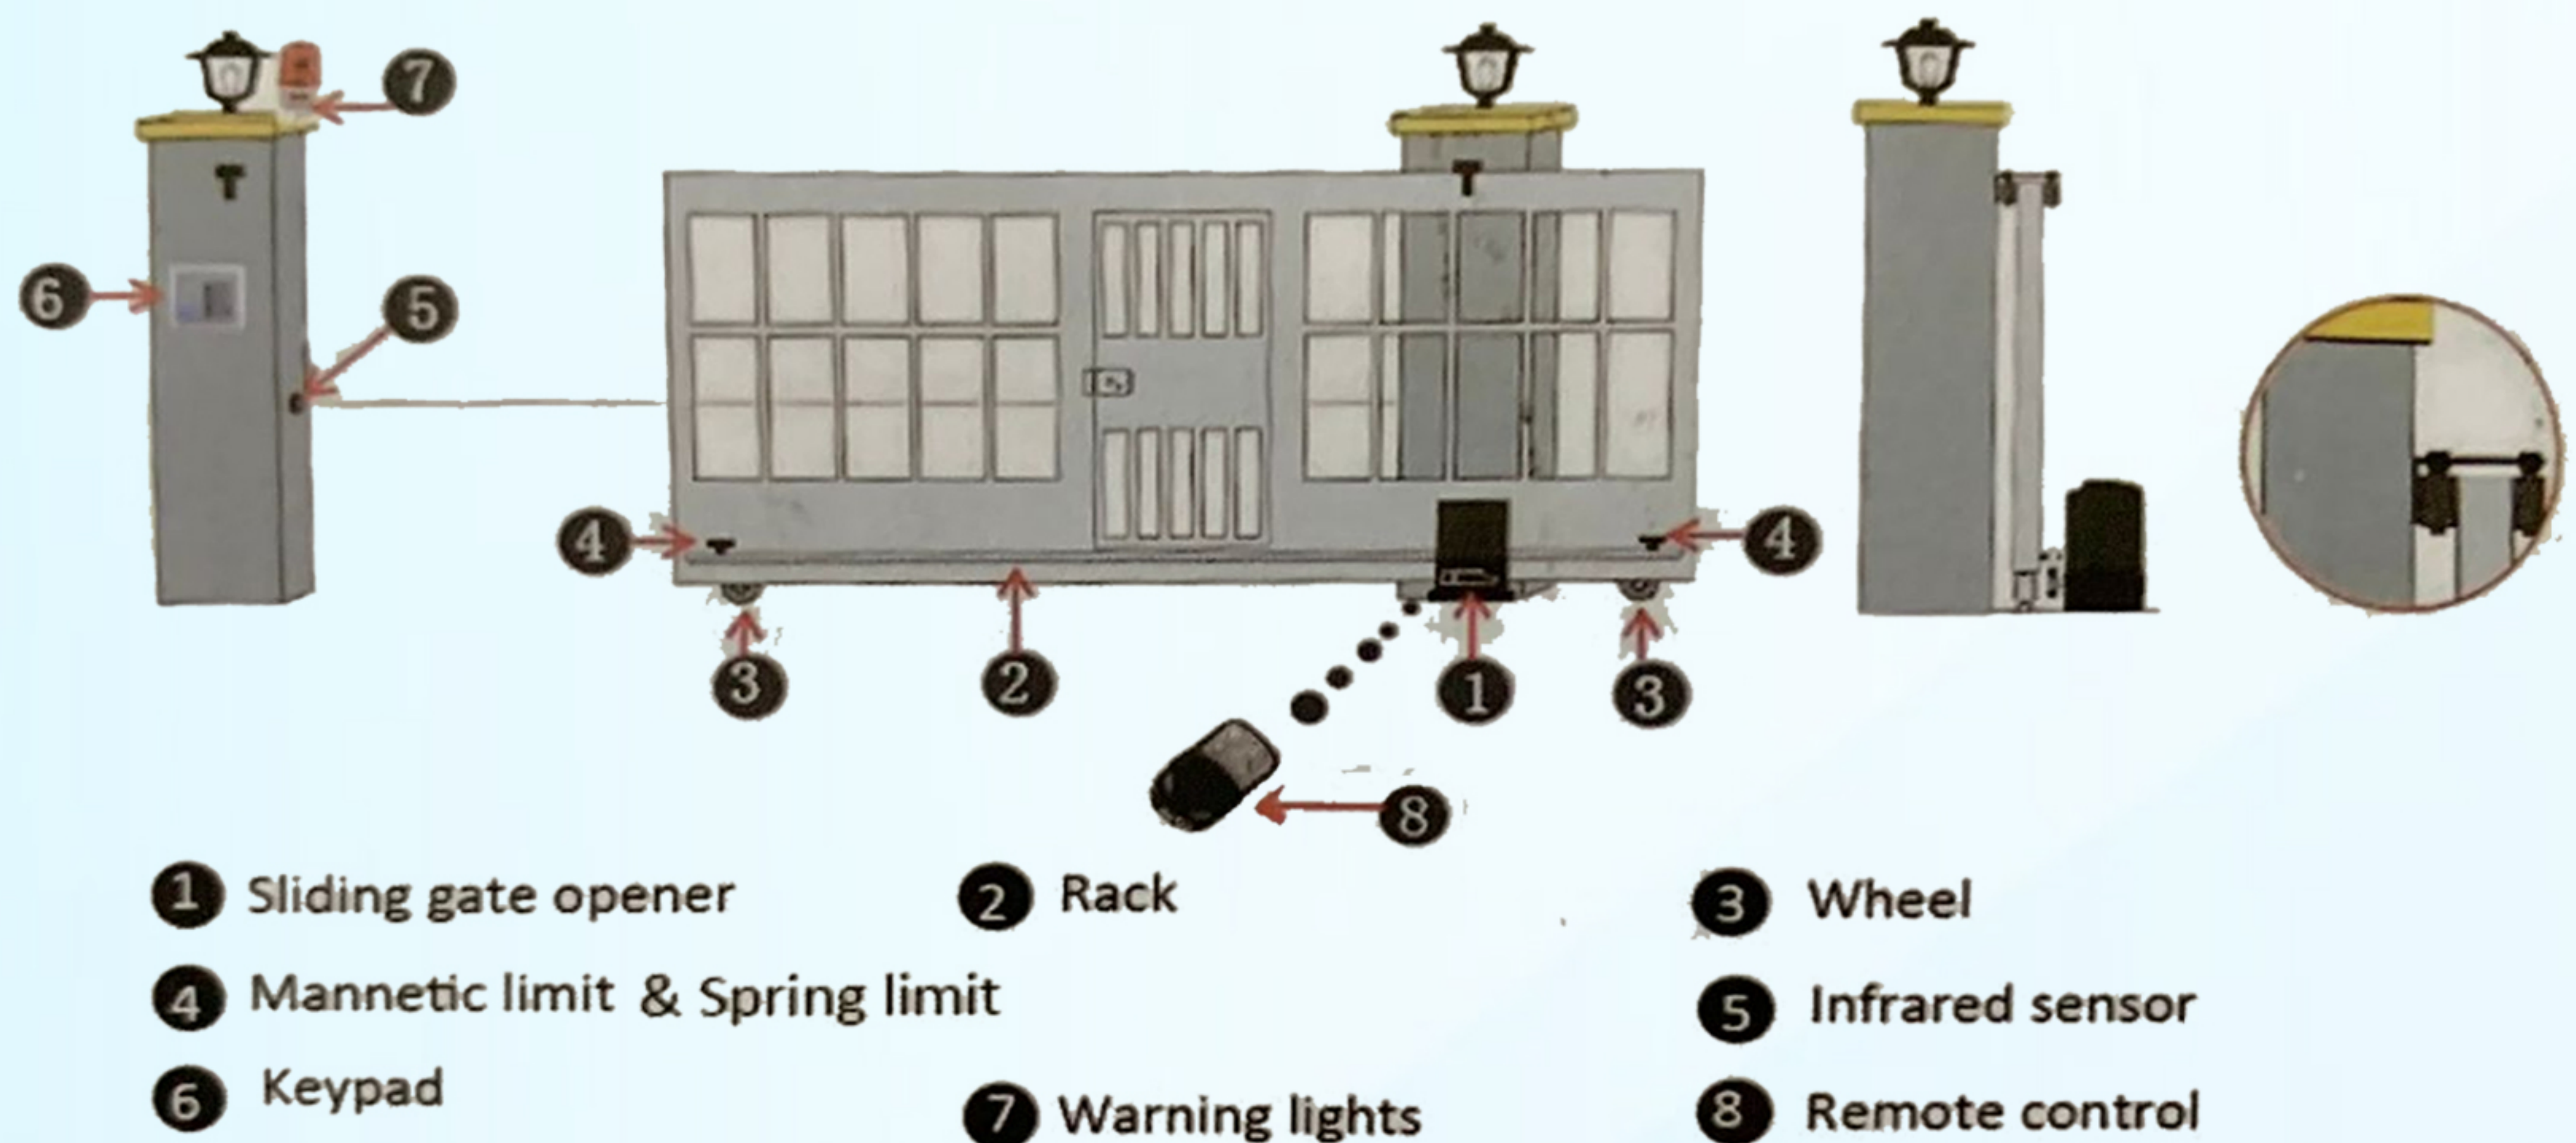

## Manual key

