




GOLDUNITED SDN BHD



HSRM Lowdeck ® Roofing

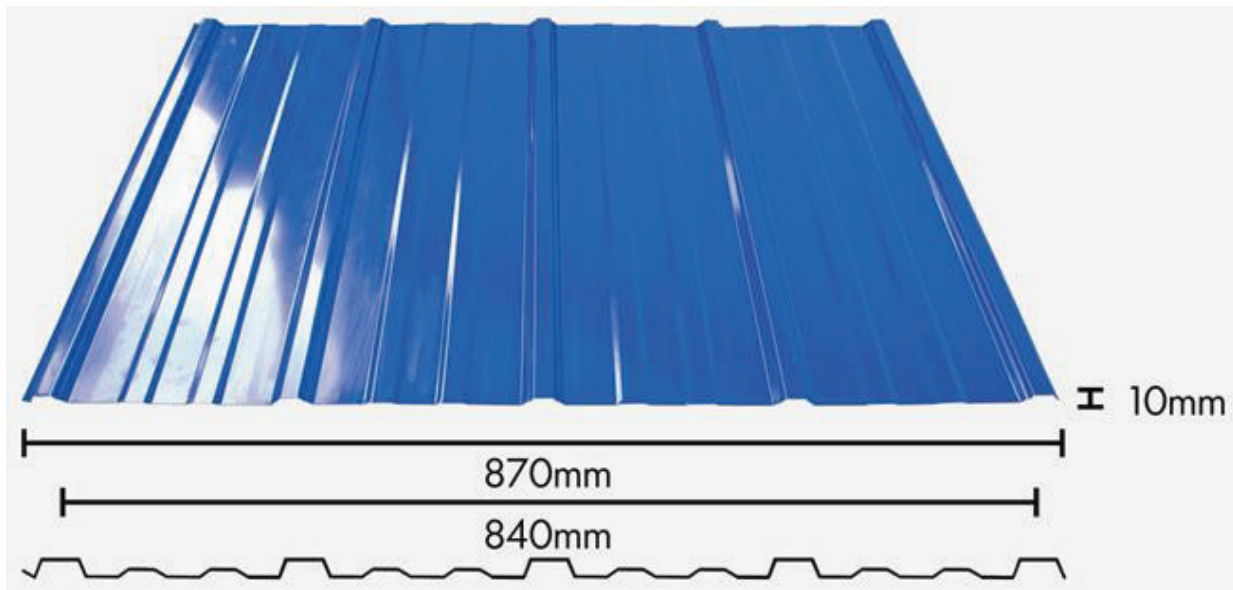




Material Specification

Aluminium-Zinc Coating	55% Al-Zn Alloy Coating
Paint Coating	Top: 20 Microns Top Paint
	Back: 5 Microns Corrosion, Inhibitive Coat
Roof Pitch	Suitable for any roof slope from 15 degrees
Tolerance	Thickness : +/- 0.02mm
	Cover Width : +/- 2mm


Recommended Support Spacing

Total Coated Thickness mm	Minimum Recommended Pitch	Max Roof Overhang Unsupported mm	Max Roof Overhang Stiffened with 50mmx50mmx1.6mm angle and gutter mm	Max Recommended Spacing of Support				
				Roofs			Walls	
				Single Span mm	End Span mm	Internal Span mm	Single Span mm	End Span mm
0.47	15°	200	150	950	1000	1000	1500	1800
0.40	15°	200	150	750	900	900	1200	1600
0.33	15°	200	150	450	600	600	1000	1000
0.30	15°	200	50	450	600	600	1000	1000

Accessories Used For Lowdeck Roofing

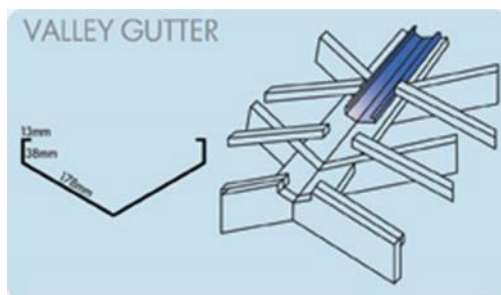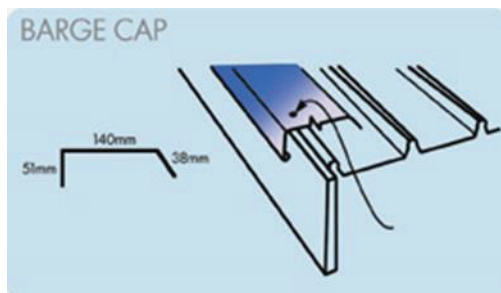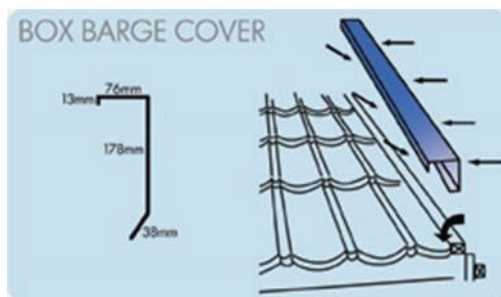

RIDGE CAP

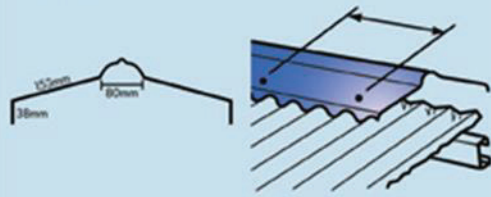

WALL FLASHING

