


Construction Tape Product Catalogue

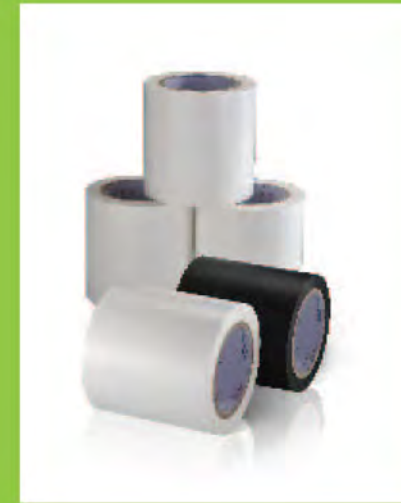

📍 Lot 12, Tapak Perindustrian Pekan Belait,
KA3131, Kuala Belait, Brunei Darussalam

☎ Call us at (+673) 333 0965

✉ enquiry@goldunited.com




Product Introduction

General Description

Zrenite construction tape is one of the core products under Zrenite brand, with exquisite crafts and excellent quality. Our company provides a full range of solutions in research and development, manufacturing and sales to meet customer needs, and continuously develops the products with core competitiveness and independent innovation capabilities.

The construction tape products of "Zrenite" has passed the national authorities testing and mainly produce PE tape, masking tape, foam tape, wrapping film, paper tape, warning tape, duct tape, etc, which can meet the needs of different customers.

Model Description

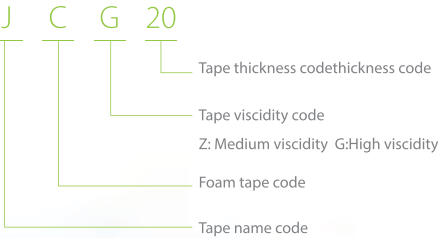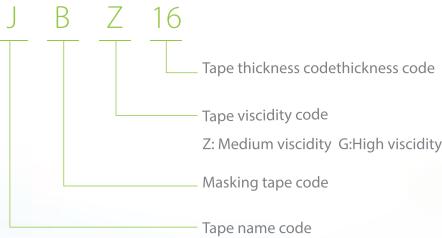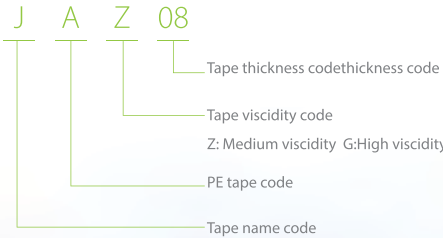

Overview PE tape, masking tape, foam tape, wrapping film and paper tape.



Definition

PE, the full name is Polyethylene, the simplest polymer organic compound. Because of its soft, good adhesion, easy stick and peel, no adhesive residue after peeling, it is widely praised by the industry.

Feature

Stable adhesion, no adhesive residue after peeling.

Application

Widely applied for varies profile of window and door , varies types of plates, doors and glass whose surface needed to protect.



Parameter

Model	Size:(Width*Length)	Thickness	Viscosity	Finish of stucked surface	Color
JAZ08	80mmx50m 100mmx50m 120mmx50m	0.08mm	Medium viscosity	Smooth surface (such as electrophoresis)	Milk white
JAG08	80mmx50m 100mmx50m 120mmx50m	0.08mm	High viscosity	Rough surface (such as spray painting)	Milk white
JAZ10	80mmx50m 100mmx50m 120mmx50m	0.1mm	Medium viscosity	Smooth surface (such as electrophoresis)	Milk white
JAG10	80mmx50m 100mmx50m 120mmx50m	0.1mm	High viscosity	Rough surface (such as spray painting)	Milk white

Selection tips:

The viscosity selection of PE tape need to difference from the smoothness of the stucked surface.



Definition

Masking tape is a roll-shaped tape which made of crepe paper and glue as the main raw material, coated with adhesive on paper and coated with anti-adhesive material on the other side. It has features of high temperature resistance, good resistance to chemical solvents, high adhesion, softness and no adhesive residue after peeling.

Feature

Easy stick and peel.

Application


It is widely used in the protection of raw materials on the exterior wall of building curtain wall. It can provide instant adhesion and ideal paste, apply to light interior decoration and cover. It can be stably stuck on the corners and contours.

Parameter

Model	Size:(Width*Length)	Thickness	Viscosity	Color
JBZ16	18mmx20m 20mmx20m 24mmx20m	0.16mm	Medium viscosity	Beige

Note:

The width of tape can be customized according to

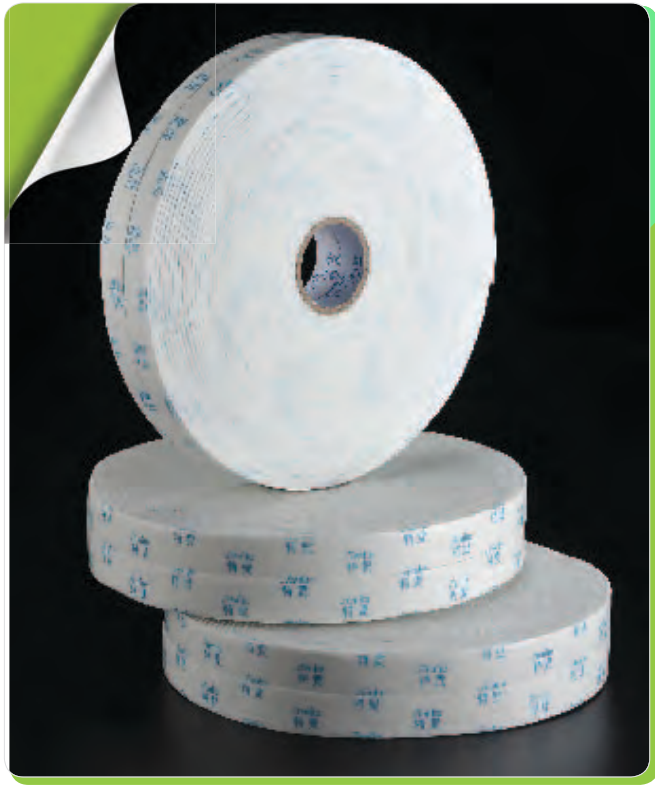

Definition

Foam tape is made of foamed substrate with glue on. It has excellent sealability; excellent compression resistance, that is durable elasticity, provides accessory with long-term shockproof; Excellent wetting on the surface, easy bond, easy operation, easy cut; long-lasting viscosity, large peeling resistance, strong initial tack, good weather resistance! Fit snugly on curved surfaces.

Feature

Easy connection and fixed.

Application

Widely used in forming of aluminum composite, bonding of window gap, door gap, plastic with low bonding ability, powder coating surface and etc.



Parameter

Model	Size:(Width*Length)	Thickness	Viscosity	Color
JCG20	18mmx15m 20mmx15m	2.0mm	High viscosity	White
JCG25	18mmx12m 20mmx12m	2.5mm	High viscosity	White
JCG30	18mmx10m 20mmx10m	3.0mm	High viscosity	White

Note:
The width of tape can be customized according to customer demand.



Definition

Wrapping film, also known as stretch film, is characterized by softness, lightness, superior stretchability, puncture resistance and tear resistance, and has large retractability and long-lasting tightening force. High transparency, high longitudinal elongation, high yield strength and lateral tear strength.

Feature

Environmental protection, tear resistance, puncture resistance, tensile properties

Application

Widely used in the protection of aluminum and door mullion, profile protection, warehouse storage and logistics palletizing and other fields.



Parameter

Model	Size:(Width*Length)	Thickness	Viscosity	Color
JGW03	20kg/bags	0.03mm	N/A	Transparent

Note:
Standard width: 60mm, 80mm, 100mm,120mm etc.



Definition


The base material of paper tape is paper, with features of water resistance, solvent resistance, fast paste, easy peel, no residue, easy break, available for writing and etc.; It is especially suitable for outdoor work and have a good effect of branching.

Feature

Won't be dissolved by chemical flux.

Application

Mainly used for construction decoration, indoor and outdoor painting, metal, rubber, plastic parts, automobile manufacturing, furniture, office furniture, wood, musical instruments, sports equipment, etc.

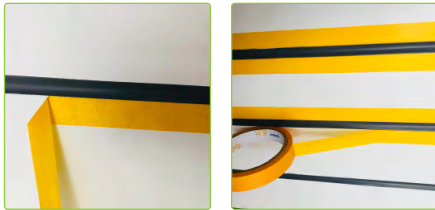

Parameter

Model	Size:(Width*Length)	Thickness	Viscosity	Color
JHG10	18mmx20m 20mmx20m	0.10mm	Medium viscosity	yellow

Note:
The width of tape can be customized according to customer demand.



Definition

Masking film tape is made of crepe paper or paper tape and PE film, with self-stick function and advanced folding technology. It is in small size for easy carrying. After high-tech treatment, it can anti-paint corrosion, is a perfect environmental protection spray products in waterproof, shielding, etc.

Feature

self-stick and easy tear.

Application

It is widely used for protection of doors, windows, floors, furniture and lamps during decoration. It can prevent paint from spilling on the surface of other objects. And it is the most perfect covering material for architectural decoration.



Parameter

Model	Size:(Width*Length)	Thickness	Viscosity	Color
JDZ04	550mmx25m 1100mmx25m	0.04mm	medium viscosity	semi-transparent
JDZ04	1500mmx25m 2400mmx25m	0.04mm	medium viscosity	semi-transparent

Note:

The width of tape can be customized according to customer demand.